



# Linear T8 / T5 Fluorescent

Low profile linear T8 / T5 fixture for remote ballast installation

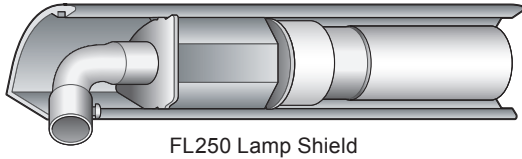

FL250 Lamp Shield

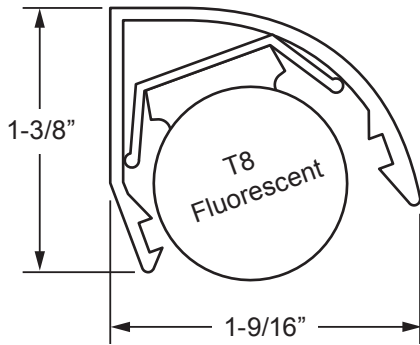

FL250 Lamp Shield  
Actual Size

## Specifications

- Unit includes a 100 - 277 Vac Ballast and enclosure.
- Extruded aluminum shield available in anodized brushed aluminum and polished brass finished.
- All fixtures made to specified length  $\pm 1/32$ ".
- Matching end caps, (optional).
- Available in T8: 15w, 17w, 25w, 32w, or 40w.
- Available in T5: 4w, 6w, 8w, 14w, 21w, 28w, or 35w.
- 2 year warranty
- Standard 4100K color.
- Unit includes all connecting hardware.
- Installed End Feed connector accepts 3/8" steel flex conduit (72").
- Installed Front Feed connector accepts 1/2" downtube plus flex conduit of 36".
- Wired with 9' primary voltage leads.
- Mounting accomplished with rails or fasteners through aluminum shield.



Made in the USA



UL Standard: 1598  
UL File Number: 123228

T8 Watts $\approx$ LTH.	T5 Watts $\approx$ LTH.
13W $\approx$ 12"	8W $\approx$ 12"
14W $\approx$ 15"	----
15W $\approx$ 18"	----
17W $\approx$ 24"	14W $\approx$ 22"
25W $\approx$ 36"	21W $\approx$ 34"
32W $\approx$ 48"	38W $\approx$ 46"
40W $\approx$ 59"	35W $\approx$ 58"

MODEL	COLOR TEMP.	STANDARD FINISHES	FEED TYPE
FL250	4100K	CA - Brushed Satin GA - Brushed Gold BLK - Brushed Black BA - Polished Chrome BG - Polished Brass	Straight (End Feed) 90° (Front Feed)



Division of Alumafab Corp.

## Showcase Components Inc.

15122 Vermont Ave., Paramount, CA 90723  
sales@ShowcaseComponents.com  
www.ShowcaseComponents.com

(800) 982-5548

(562) 630-6440

Fax: (562) 633-1859